



PRECISION[®]

PIPES




M.G. CABLE INDUSTRIES

Manufacturers : GI Cable Trays & All Earthing Materials

3/5, Ground Floor, Takwadi, Opp Yevale Tea Centre, Kalbadevi Road, Mumbai-400002. • Tel.: +91 22 4973 3629, 4913 7629
Cell : +91 96995 47310 • Email : mgcables29@gmail.com / info@mgcables.com • Website : www.mgcables.com

Authorised Stockist :

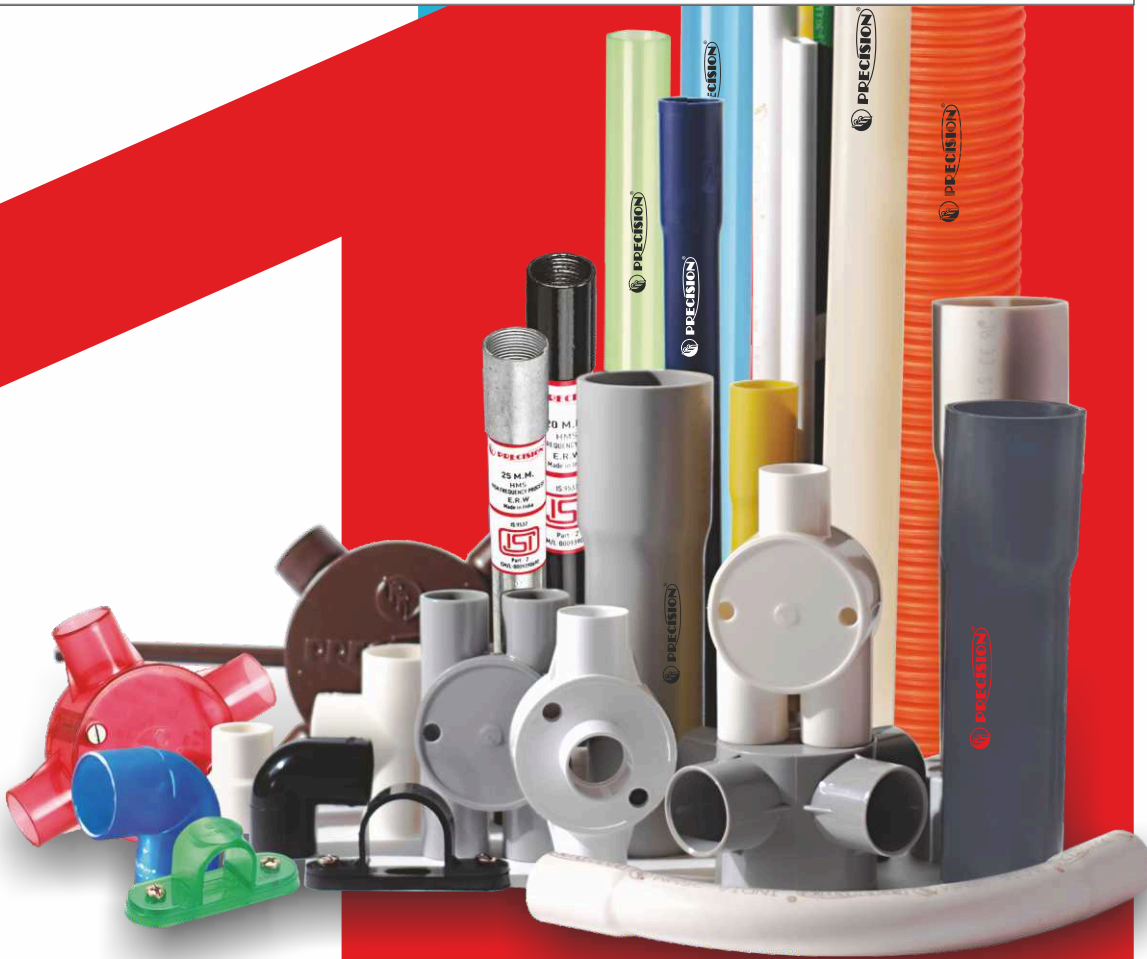

ELECTRICAL PIPING SYSTEMS

Har Building ki Lifeline
PRECISION PIPELINE

PRICE LIST
31st Aug. 2021

Round Conduit uPVC Pipes & Fittings



Precision Round Conduit uPVC Pipes and Fittings

are manufactured from a specially formulated unplasticised polyvinyl chloride (uPVC) to meet the most stringent Indian and international standards. Our products are made of extra super high impact materials which make them safe to use in harsh environments. The products are manufactured in accordance with IS 9537-Part 3, BS EN 61386-21 for uPVC conduits, IS 3419:1988 and BS 4607 for uPVC fittings.

Our Premium range of **Transparent Round conduit uPVC pipes and fittings** are also available in Red, Green, Blue & Yellow colours on request.

Applications

Channelising concealed and surface wiring.
Telecommunication and cable ducting.

DIMENSIONS OF ROUND CONDUIT uPVC PIPES IS 9537-PART 3					
Normal Size (mm)	Outside Diameter (mm)	Tolerance On Outside Diameter (mm)	Inside Diameter (Min) (mm)		
			Light	Medium	Heavy
16	16	-0.3	13.7	13.0	12.2
20	20	-0.3	17.4	16.9	15.8
25	25	-0.4	22.1	21.4	20.6
32	32	-0.4	28.6	27.8	26.6
40	40	-0.4	35.8	35.4	34.4
50	50	-0.5	45.1	44.3	43.2
63	63	-0.6	57.0	-	-
#Special Sizes					
19	19	-0.3	16.5	16.0	15.1
38	38	-0.4	33.7	33.4	32.4

Features

- Various diameters and grades.
- Light, medium and heavy mechanical stress, to suit various applications and site conditions.
- Easy and fast installation.
- Wide range of component maximises application.
- Durable and impact resistant.
- Fire retardant • Corrosion free.
- Thermal resistant from -5° C to +60° C.
- Precision circular boxes and adaptable boxes are provided with M4 brass insert with a load suspension capacity of 3 Kgs at 60° C.



Laser engraved pipes



Fire retardant, corrosion free



Easy and quick installation

Colours



Black, Grey, Ivory & White



Red, Green, Blue & Yellow

ROUND CONDUIT uPVC PIPES (SOCKETED)

HSN : 39172310

COLOUR : **BLACK** **GREY** **IVORY** **WHITE** **RED** **GREEN** **BLUE** **YELLOW**

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		North India Pkg.	RATE (Mtr)
		OD (mm)	Pc x Mtr	Mtr / Bdl	Mtr / Bdl	
LMS (LIGHT MECHANICAL STRESS) FRLS≈						
1	PRCS 16L	16	100 x 3m	300	-	25.50
2	PRCS 19L	19	100 x 3m	300	-	31.00
3	PRCS 19LNI	19	40 x 3m	-	120	31.00
4	PRCS 20L	20	100 x 3m	300	-	32.00
5	PRCS 20LNI	20	40 x 3m	-	120	32.00
6	PRCS 25L	25	100 x 3m	300	-	45.50
7	PRCS 25LNI	25	25 x 3m	-	75	45.50
8	PRCS 32L	32	50 x 3m	150	-	69.00
9	PRCS 32LNI	32	10 x 3m	-	30	69.00
10	PRCS 38L	38	30 x 3m	90	-	82.00
11	PRCS 40L	40	25 x 3m	75	-	109.00
12	PRCS 40LNI	40	5 x 3m	-	15	109.00
13	PRCS 50L	50	20 x 3m	60	-	157.00
14	PRCS 50LNI	50	5 x 3m	-	15	157.00
15	PRCS 63L	63	18 x 3m	54	-	233.00
MMS (MEDIUM MECHANICAL STRESS) FRLS≈						
16	PRCS 16M	16	100 x 3m	300	-	31.00
17	PRCS 19M	19	100 x 3m	300	-	35.00
18	PRCS 19MNI	19	40 x 3m	-	120	35.00
19	PRCS 20M	20	100 x 3m	300	-	39.00
20	PRCS 20MNI	20	40 x 3m	-	120	39.00
21	PRCS 25M	25	100 x 3m	300	-	53.00
22	PRCS 25MNI	25	25 x 3m	-	75	53.00
23	PRCS 32M	32	50 x 3m	150	-	84.50
24	PRCS 32MNI	32	10 x 3m	-	30	84.50
25	PRCS 38M	38	30 x 3m	90	-	116.00
26	PRCS 40M	40	25 x 3m	75	-	122.00
27	PRCS 40MNI	40	5 x 3m	-	15	122.00
28	PRCS 50M	50	20 x 3m	60	-	185.00
29	PRCS 50MNI	50	5 x 3m	-	15	185.00
HMS (HEAVY MECHANICAL STRESS) FRLS≈						
30	PRCS 16H	16	100 x 3m	300	-	39.50
31	PRCS 19H	19	100 x 3m	300	-	45.00
32	PRCS 19HNI	19	40 x 3m	-	120	45.00
33	PRCS 20H	20	100 x 3m	300	-	52.50
34	PRCS 20HNI	20	40 x 3m	-	120	52.50
35	PRCS 25H	25	50 x 3m	150	-	64.00
36	PRCS 25HNI	25	25 x 3m	-	75	64.00
37	PRCS 32H	32	50 x 3m	150	-	110.00
38	PRCS 32HNI	32	10 x 3m	-	30	110.00
39	PRCS 38H	38	30 x 3m	90	-	136.00
40	PRCS 40H	40	25 x 3m	75	-	145.00
41	PRCS 40HNI	40	5 x 3m	-	15	145.00
42	PRCS 50H	50	20 x 3m	60	-	221.00
43	PRCS 50HNI	50	5 x 3m	-	15	221.00

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		North India Pkg.	RATE (Mtr)
		OD (mm)	Pc x Mtr	Mtr / Bdl	Mtr / Bdl	
MMS (*L.H.S.F.T. CONDUIT)						
44	PSFT 20MS	20	100 x 3m	300	-	45.00
45	PSFT 20MSNI	20	40 x 3m	-	120	45.00
46	PSFT 25MS	25	100 x 3m	300	-	62.50
47	PSFT 25MSNI	25	25 x 3m	-	75	62.50
48	PSFT 32MS	32	50 x 3m	150	-	110.00
49	PSFT 32MSNI	32	10 x 3m	-	30	110.00
50	PSFT 40MS	40	25 x 3m	75	-	164.00
51	PSFT 40MSNI	40	5 x 3m	-	15	164.00
52	PSFT 50MS	50	20 x 3m	60	-	226.00
53	PSFT 50MSNI	50	5 x 3m	-	15	226.00
HMS (*L.H.S.F.T. CONDUIT)						
54	PSFT 20HS	20	100 x 3m	300	-	61.50
55	PSFT 20HSNI	20	40 x 3m	-	120	61.50
56	PSFT 25HS	25	50 x 3m	150	-	76.50
57	PSFT 25HSNI	25	25 x 3m	-	75	76.50
58	PSFT 32HS	32	50 x 3m	150	-	138.00
59	PSFT 32HSNI	32	10 x 3m	-	30	138.00
60	PSFT 40HS	40	25 x 3m	75	-	190.00
61	PSFT 40HSNI	40	5 x 3m	-	15	190.00
62	PSFT 50HS	50	20 x 3m	60	-	277.00
63	PSFT 50HSNI	50	5 x 3m	-	15	277.00



Special Size

≈ FRLS : Fire Retardant - Low Smoke

* LHSFT : Low Halogen - Smoke Suppressing - Fire Retardant - Temperature Stable Lead Free

ROUND CONDUIT uPVC PIPE FITTINGS

HSN : 73201019

BENDING SPRING

SR NO	PRODUCT CODE	SIZE	COLOUR	STANDARD PACK		RATE (Pc)
		OD (mm)		Pc/Bag	Pc/Cart	
LIGHT GAUGE						
64	PBS20L	20	Green	10	50	286.00
65	PBS25L	25	Green	5	25	377.00
MEDIUM GAUGE						
66	PBS20M	20	Silver	10	50	286.00
67	PBS25M	25	Silver	5	25	377.00
HEAVY GAUGE						
68	PBS20H	20	Gold	10	50	286.00
69	PBS25H	25	Gold	5	25	377.00



ø Suitable for 19mm LMS and 19mm MMS conduits also.

ROUND CONDUIT uPVC PIPE FITTINGS

HSN : 39174000



COLOUR : BLACK GREY IVORY WHITE

CIRCULAR BOX WITHOUT LID

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)
		OD (mm)	Pc/Box	Pc/Carton	
CIRCULAR BOX - TERMINAL (1WAY)					
70	PRCB 191	19	20	600	24.00
71	PRCB 201	20	20	600	24.50
72	PRCB 251	25	15	450	31.50
73	PRCB 321	32	10	160	58.00
74	PRCB 401	40	10	160	69.50
75	PRCB 501	50	5	80	124.00
CIRCULAR BOX - ANGLE (2WAY)					
76	PRCB 192A	19	20	400	25.00
77	PRCB 202A	20	20	400	25.50
78	PRCB 252A	25	15	300	32.50
79	PRCB 322A	32	10	160	61.00
80	PRCB 402A	40	10	160	75.00
81	PRCB 502A	50	5	80	137.00
CIRCULAR BOX - THROUGH (2 WAY)					
82	PRCB 192S	19	20	400	25.00
83	PRCB 202S	20	20	400	25.50
84	PRCB 252S	25	15	300	32.50
85	PRCB 322S	32	10	160	61.00
86	PRCB 402S	40	10	160	75.00
87	PRCB 502S	50	5	80	137.00
CIRCULAR BOX - TEE (3 WAY)					
88	PRCB 193	19	20	400	28.00
89	PRCB 203	20	20	400	28.50
90	PRCB 253	25	15	300	37.50
91	PRCB 323	32	10	160	62.50
92	PRCB 403	40	10	160	79.00
93	PRCB 503	50	5	80	149.00
CIRCULAR BOX - INTERSECTION (4 WAY)					
94	PRCB 194	19	20	400	30.00
95	PRCB 204	20	20	400	30.50
96	PRCB 254	25	15	240	42.50
97	PRCB 324	32	10	160	66.00
98	PRCB 404	40	10	160	91.00
99	PRCB 504	50	5	80	161.00

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)
		OD (mm)	Pc/Box	Pc/Carton	
DEEP CIRCULAR BOX - TERMINAL (1 WAY)					
100	PRCB 191D	19	10	280	41.00
101	PRCB 201D	20	10	280	41.50
102	PRCB 251D	25	10	280	50.00
103	PRCB 321D	32	10	280	58.50
DEEP CIRCULAR BOX - ANGLE (2 WAY)					
104	PRCB 192AD	19	10	280	42.50
105	PRCB 202AD	20	10	280	43.00
106	PRCB 252AD	25	10	280	52.00
107	PRCB 322AD	32	10	280	62.50
DEEP CIRCULAR BOX - THROUGH (2 WAY)					
108	PRCB 192SD	19	10	200	42.50
109	PRCB 202SD	20	10	200	43.00
110	PRCB 252SD	25	10	200	52.00
111	PRCB 322SD	32	10	200	62.50
DEEP CIRCULAR BOX - TEE (3 WAY)					
112	PRCB 193D	19	10	220	45.00
113	PRCB 203D	20	10	220	48.00
114	PRCB 253D	25	10	220	61.00
115	PRCB 323D	32	10	160	67.50
DEEP CIRCULAR BOX - INTERSECTION (4 WAY)					
116	PRCB 194D	19	10	220	49.00
117	PRCB 204D	20	10	220	50.00
118	PRCB 254D	25	10	220	64.00
119	PRCB 324D	32	10	160	69.00
CIRCULAR BOX BRANCH - 2WAY (U)					
120	PRCB 19U	19	20	400	42.50
121	PRCB 20U	20	20	400	43.00
122	PRCB 25U	25	20	400	58.00
CIRCULAR BOX BRANCH - 3WAY (Y)					
123	PRCB 19Y	19	20	400	45.00
124	PRCB 20Y	20	20	400	48.00
125	PRCB 25Y	25	15	300	62.50

COLOUR : **BLACK** **GREY** **IVORY** **WHITE**

CIRCULAR BOX WITHOUT LID

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)
		OD (mm)	Pc/Box	Pc/Carton	
CIRCULAR BOX BRANCH - 4WAY (H)					
126	PRCB 19H	19	15	300	49.00
127	PRCB 20H	20	15	300	50.00
128	PRCB 25H	25	15	300	67.50
CIRCULAR BOX BACK OUTLET (1 WAY)					
129	PRCB 201 BO	20	20	400	42.50
130	PRCB 251 BO	25	15	300	59.50
CIRCULAR BOX BACK OUTLET THROUGH (2 WAY)					
131	PRCB 202S BO	20	20	400	43.00
132	PRCB 252S BO	25	15	300	62.50
CIRCULAR BOX BACK OUTLET ANGLE (2 WAY)					
133	PRCB 202A BO	20	20	400	43.00
134	PRCB 252A BO	25	15	300	62.50
CIRCULAR BOX BACK OUTLET TEE (3 WAY)					
135	PRCB 203 BO	20	20	400	48.00
136	PRCB 253 BO	25	15	300	67.50
CIRCULAR LID (WITH SCREW)					
137	PRCL65*	65	100	2000	8.50
138	PRCL80#	80	100	2000	17.00
139	PRCL85	85	100	2000	17.50
140	PRCL90	90	100	1800	20.00
141	PRCL93	93	25	750	20.00
142	PRCL110	110	50	900	31.00
CIRCULAR LID (WITHOUT SCREW)					
143	PRCL65WS*	65	100	2000	6.50
144	PRCL80WS#	80	100	2000	16.50
145	PRCL85WS	85	100	2000	17.00
146	PRCL90WS	90	100	1800	19.00
147	PRCL93WS	93	25	750	19.00
148	PRCL110WS	110	50	900	30.50

>65 - For 19/20/25mm JB, DJB & 32 DJB ø80 - For 32/40mm JB
 ~93 - For 50 mm JB

CIRCULAR BOX WITH LID AND SCREW

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)
		OD (mm)	Pc/Box	Pc/Carton	
CIRCULAR BOX - ANGLE - 2 WAY					
157	PRCB 192AL	19	20	400	34.00
158	PRCB 202AL	20	20	400	35.50
159	PRCB 252AL	25	15	300	41.50
160	PRCB 322AL	32	10	160	79.00
161	PRCB 402AL	40	10	160	93.50
162	PRCB 502AL	50	5	80	158.00
CIRCULAR BOX - ANGLE - 2 WAY (AUTO LID W/O SCREW) NEW					
163	PRCB 202AAL	20	15	270	34.00
164	PRCB 252AAL	25	10	180	40.00
Auto Lid w/o insert & screw					
CIRCULAR BOX - THROUGH - 2 WAY					
165	PRCB 192SL	19	20	400	34.00
166	PRCB 202SL	20	20	400	35.50
167	PRCB 252SL	25	15	300	41.50
168	PRCB 322SL	32	10	160	79.00
169	PRCB 402SL	40	10	160	93.50
170	PRCB 502SL	50	5	80	158.00
CIRCULAR BOX - THROUGH - 2 WAY (AUTO LID W/O SCREW) NEW					
171	PRCB 202SAL	20	15	270	34.00
172	PRCB 252SAL	25	10	180	40.00
Auto Lid w/o insert & screw					
CIRCULAR BOX - TEE - 3 WAY					
173	PRCB 193L	19	20	400	37.50
174	PRCB 203L	20	20	400	38.00
175	PRCB 253L	25	15	300	45.00
176	PRCB 323L	32	5	110	80.50
177	PRCB 403L	40	5	110	96.50
178	PRCB 503L	50	5	80	172.00
CIRCULAR BOX - TEE - 3 WAY (AUTO LID W/O SCREW) NEW					
179	PRCB 203AL	20	15	270	36.00
180	PRCB 253AL	25	10	180	43.50
Auto Lid w/o insert & screw					
CIRCULAR BOX - INTERSECTION (4 WAY)					
181	PRCB 194L	19	20	320	40.00
182	PRCB 204L	20	20	320	40.50
283	PRCB 254L	25	15	240	51.50
184	PRCB 324L	32	5	110	84.00
185	PRCB 404L	40	5	110	108.00
186	PRCB 504L	50	5	80	184.00
CIRCULAR BOX - INTERSECTION - 4 WAY (AUTO LID W/O SCREW) NEW					
187	PRCB 204AL	20	12	216	39.00
188	PRCB 254AL	25	15	150	50.00
Auto Lid w/o insert & screw					

CIRCULAR BOX WITH LID AND SCREW

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)
		OD (mm)	Pc/Box	Pc/Carton	
CIRCULAR BOX - TERMINAL - 1WAY					
149	PRCB 191L	19	20	600	31.00
150	PRCB 201L	20	20	600	31.50
151	PRCB 251L	25	15	450	41.00
152	PRCB 321L	32	10	160	74.50
153	PRCB 401L	40	10	160	88.50
154	PRCB 501L	50	5	80	146.00
CIRCULAR BOX - TERMINAL - 1 WAY (AUTO LID W/O SCREW) NEW					
155	PRCB 201AL	20	20	360	30.00
156	PRCB 251AL	25	15	270	39.50
Auto Lid w/o insert & screw					













ROUND CONDUIT uPVC PIPE FITTINGS









HSN : 39174000



COLOUR : BLACK GREY IVORY WHITE

CIRCULAR BOX WITH LID AND SCREW

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)	
		OD (mm)	Pc/Box	Pc/Carton		
DEEP CIRCULAR BOX - TERMINAL (1 WAY)						
189	PRCB 191DL	19	10	280	49.00	
190	PRCB 201DL	20	10	280	50.00	
191	PRCB 251DL	25	10	280	59.00	
192	PRCB 321DL	32	10	280	66.50	
DEEP CIRCULAR BOX - ANGLE (2 WAY)						
193	PRCB 192ADL	19	10	280	52.50	
194	PRCB 202ADL	20	10	280	53.00	
195	PRCB 252ADL	25	10	280	60.50	
196	PRCB 322ADL	32	10	280	72.00	
DEEP CIRCULAR BOX - THROUGH (2 WAY)						
197	PRCB 192SDL	19	10	200	52.50	
198	PRCB 202SDL	20	10	200	53.00	
199	PRCB 252SDL	25	10	200	60.50	
200	PRCB 322SDL	32	10	200	72.00	
DEEP CIRCULAR BOX - TEE (3 WAY)						
201	PRCB 193DL	19	10	220	54.50	
202	PRCB 203DL	20	10	220	55.50	
203	PRCB 253DL	25	10	220	70.50	
204	PRCB 323DL	32	10	160	76.00	
DEEP CIRCULAR BOX - INTERSECTION (4 WAY)						
205	PRCB 194DL	19	10	220	58.00	
206	PRCB 204DL	20	10	220	58.50	
207	PRCB 254DL	25	10	220	73.50	
208	PRCB 324DL	32	10	160	76.50	
CIRCULAR BOX BRANCH - 2 WAY (U)						
209	PRCB 19UL	19	20	400	52.50	
210	PRCB 20UL	20	20	400	53.00	
211	PRCB 25UL	25	20	400	66.00	
CIRCULAR BOX BRANCH - 3 WAY (Y)						
212	PRCB 19YL	19	15	300	54.50	
213	PRCB 20YL	20	15	300	55.50	
214	PRCB 25YL	25	15	300	71.00	
CIRCULAR BOX BRANCH - 4 WAY (H)						
215	PRCB 19HL	19	15	300	58.00	
216	PRCB 20HL	20	15	300	58.50	
217	PRCB 25HL	25	15	300	76.00	
CIRCULAR BOX BACK OUTLET (1 WAY)						
218	PRCB 201 BOL	20	20	400	52.00	
219	PRCB 251 BOL	25	15	300	69.00	
CIRCULAR BOX BACK OUTLET THROUGH (2 WAY)						
220	PRCB 202S BOL	20	15	300	53.00	
221	PRCB 252S BOL	25	15	240	71.00	
CIRCULAR BOX BACK OUTLET ANGLE (2 WAY)						
222	PRCB 202A BOL	20	15	300	53.00	
223	PRCB 252A BOL	25	15	240	71.00	
CIRCULAR BOX BACK OUTLET TEE (3 WAY)						
224	PRCB 203 BOL	20	15	300	55.50	
225	PRCB 253 BOL	25	15	240	76.00	

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)	
		OD (mm)	Pc/Box	Pc/Carton		
CIRCULAR EXTENSION RING						
226	PRER 20	20	50	800	17.00	
227	PRER 25	25	40	640	22.50	
LOOP IN BOX						
228	PRLB 19	19 (4 punch)	20	400	25.00	
229	PRLB 20	20 (4 punch)	20	400	25.50	
230	PRLB 25	25 (2 punch)	20	400	25.50	
LOOP IN BOX EXTENSION						
231	PRLB 20E	20	24	384	37.50	
COUPLER						
232	PCR 19	19	100	2000	6.50	
233	PCR 20	20	100	2000	8.50	
234	PCR 20 L	20 Long	150	2400	8.50	
235	PCR 25	25	100	2000	10.00	
236	PCR 32	32	60	960	18.00	
237	PCR 38	38	30	480	27.50	
238	PCR 40	40	30	480	30.50	
239	PCR 50	50	20	320	51.50	
EXPANSION COUPLER						
240	PCR 20E	20	20	600	10.00	
241	PCR 25E	25	12	360	17.50	
242	PCR 32E	32	8	240	32.50	
243	PCR 38E	38	10	200	41.50	
244	PCR 50E	50	10	160	58.00	
REDUCER COUPLER (PIPE TO FITTING)						
245	PRR 1	25>20	250	4000	10.00	
REDUCER COUPLER (PIPE TO PIPE)						
246	PRR 2520	25 > 20	75	1500	10.50	
247	PRR 3220	32 > 20	60	1200	14.50	
248	PRR 3225	32 > 25	40	800	18.00	
249	PRR 4020	40 > 20	48	960	22.50	
250	PRR 4032	40 > 32	32	640	25.00	
251	PRR 5032	50 > 32	30	480	30.50	
252	PRR 5040	50 > 40	30	480	31.50	
SLIP TYPE BEND						
253	PRBN 19	19	65	1040	11.50	
254	PRBN 20	20	65	1040	11.50	
255	PRBN 25	25	35	560	20.50	
256	PRBN 32	32	20	320	53.00	
257	PRBN 38	38	10	160	64.50	
258	PRBN 40	40	10	160	106.00	
259	PRBN 50	50	5	80	148.00	
260	PRBN 63	63	-	50	213.00	

ROUND CONDUIT uPVC PIPE FITTINGS

HSN : 39174000



COLOUR : BLACK GREY IVORY WHITE

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)
		OD (mm)	Pc/Box	Pc/Carton	
SLIP TYPE LONG BEND					
261	PRBL 19	19	45	720	17.50
262	PRBL 20	20	45	720	17.50
263	PRBL 25	25	20	320	30.50
264	PRBL 32	32	10	160	73.00
265	PRBL 38	38	-	100	90.50
266	PRBL 40	40	-	80	144.00
267	PRBL 50	50	-	55	215.00
SPACE BAR SADDLE					
268	PRBS 19	19	100	2000	10.50
269	PRBS 20	20	100	2000	11.50
270	PRBS 25	25	100	2000	13.50
271	PRBS 32	32	100	1600	22.50
272	PRBS 38	38	80	1280	25.00
273	PRBS 40	40	80	1280	25.50
274	PRBS 50	50	60	960	30.50
275	PRBS 63	63	-	50	40.50
SADDLE STRAP					
276	PRSS 19	19	100	2000	6.00
277	PRSS 20	20	100	2000	6.50
278	PRSS 25	25	100	2000	8.50
279	PRSS 32	32	100	1600	10.50
280	PRSS 38	38	80	1280	13.00
281	PRSS 40	40	80	1280	13.50
282	PRSS 50	50	60	960	17.50
ROUND 'U' CLIP					
283	PRUC 20	20	200	4000	10.00
284	PRUC 25	25	100	3000	16.00
END CAP					
285	PREC 20	20	150	3000	4.50
286	PREC 25	25	100	2000	6.50
287	PREC 32	32	70	1400	8.50
288	PREC 40	40	32	640	14.50
289	PREC 50	50	24	480	22.50
MALE BUSH ADAPTOR					
290	PMBA 19	19	100	2000	10.50
291	PMBA 20	20	100	2000	11.50
292	PMBA 25	25	100	2000	13.00
FEMALE BUSH ADAPTOR					
293	PFBA 19	19	100	2000	10.50
294	PFBA 20	20	100	2000	11.50
295	PFBA 25	25	100	2000	14.50
296	PFBA 32	32	75	1200	34.00
297	PFBA 38	38	50	800	44.50
298	PFBA 40	40	50	800	44.50
299	PFBA 50	50	25	400	76.00

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)	
		OD (mm)	Pc/Box	Pc/Carton		
ROUND ELBOW						
300	PRE 20	20	125	2500	10.50	
301	PRE 25	25	75	1200	14.50	
302	PRE 32	32	20	400	20.00	
303	PRE 40	40	15	300	27.50	
304	PRE 50	50	10	200	49.00	
ROUND TEE						
305	PRT 20	20	50	1500	23.00	
306	PRT 25	25	50	800	25.50	
307	PRT 32	32	15	300	28.50	
308	PRT 40	40	10	200	39.50	
309	PRT 50	50	10	160	61.00	
INSPECTION ELBOW						
310	PIE 20	20	20	600	42.50	
311	PIE 25	25	20	400	53.00	
INSPECTION TEE						
312	PIT 20	20	20	600	43.00	
313	PIT 25	25	20	400	62.50	
INSPECTION BEND						
314	PIB 20	20	20	600	43.00	
315	PIB 25	25	20	400	62.50	
ADAPTABLE BOX WITH LID						
Δ	316	PAB 75L	3" x 3" x 2" 75x75x50	10	200	93.50
◇	317	PAB 110L	4" x 4" x 3" 110x110x75	-	100	184.00
	318	PAB 160L	6" x 4" x 3" 160x110x75	-	75	364.00
	319	PAB 160SL	6" x 6" x 3" 160x160x75	-	50	402.00
	320	PAB 225SL	9" x 9" x 3" 225x225x75	-	20	864.00
	321	PAB 300SL	12" x 12" x 4" 300x300x110	-	5	1818.00
SURFACE SWITCH BOX						
✱	322	PSB1	3" x 3"	10	300	58.00
✱	323	PSB2	6" x 3"	10	200	99.00
SWITCH BOX LID (WHITE)						
	324	PSBL1 LID	3" x 3"	40	1200	25.50
	325	PSBL2 LID	6" x 3"	25	750	34.00
FLUSH MOUNTED - SWITCH BOX						
✱	326	PFSB1	3" x 3" x 2.5"	10	200	66.00
✱	327	PFSB2	6" x 3" x 2.5"	10	160	88.50

Δ 32/38/40mm Knockout Available ✱ 20mm Knockout Available
◇ 50mm Knockout Available ✱ 20/25mm Knockout Available

ROUND CONDUIT uPVC PIPE FITTINGS

HSN : 39174000



COLOUR : **BLACK** **GREY** **IVORY** **WHITE**

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE (Pc)
			Pc/Box	Pc/Carton	
FAN BOX (BLACK)					
328	PRFB20	20 Standard	10	220	69.50
329	PRFB25	25 Standard	10	220	69.50
330	PRFB20SL	20 Large	10	140	93.50
331	PRFB25SL	25 Large	10	140	93.50
332	PRFBRD2025	20/25 With Rod	1	28	278.00
333	PRFBRD25	25 With Rod	1	28	278.00



SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE (Pc)
			Pc/Bag		
METAL FAN BOX - WITH ROD (BROWN)					
HSN : 73072900					
334	PMFB 2025	20/25	50		167.00



SR NO	PRODUCT CODE	SIZE (ml)	STANDARD PACK		RATE (Pc)
			Pc/Box	Pc/Carton	
uPVC SOLVENT CEMENT					
HSN : 35061000					
335	PSC100 ML	100ml	Transparent	24 144	69.00
336	PSC250 ML	250ml	Transparent	24 96	124.00
337	PSC500 ML	500ml	Transparent	12 48	210.00
338	PSC1L	1L	Transparent	6 24	361.00
339	PSC5L	5L	Transparent	- 6	1453.00



SR NO	PRODUCT CODE	SIZE - W (mm)xL(Mtr)	STANDARD PACK		RATE (pc)
			Pc/Box	Pc/Carton	
PVC ELECTRICAL INSULATION TAPE					
HSN : 85469090					
COLOUR : BLACK WHITE RED GREEN BLUE YELLOW					
340	PPIT 18	18x6	30	540	13.50



OVAL CONDUIT uPVC PIPES

HSN : 39172310



COLOUR : **WHITE**

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE (Mtr)
			Pc x Mtr	Mtr/Bdl	
OVAL CONDUIT uPVC PIPES					
341	POC 16	16	200 x 2m	400	18.50
342	POC 20	20	200 x 2m	400	24.50
343	POC 25	25	100 x 2m	200	32.00




OVAL CONDUIT uPVC PIPE FITTINGS

HSN : 39174000

COLOUR : **WHITE**

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE (Pc)
			Pc/Box		
OVAL CONNECTOR					
344	POCT 16	16	100		2.00
345	POCT 20	20	50		4.50
346	POCT 25	25	50		6.50
OVAL ELBOW					
347	POE 16	16	100		4.50
348	POE 20	20	75		6.50
349	POE 25	25	50		9.50
OVAL TEE					
350	POT 16	16	100		6.50
351	POT 20	20	50		8.50
352	POT 25	25	40		9.50
OVAL INTERNAL BEND					
353	POIB 16	16	100		6.50
354	POIB 20	20	50		6.50
355	POIB 25	25	25		8.50
OVAL EXTERNAL BEND					
356	POEB 16	16	100		6.50
357	POEB 20	20	50		8.50
358	POEB 25	25	25		8.50
OVAL SADDLE STRAP					
359	POSS 16	16	100		4.50
360	POSS 20	20	100		4.50
361	POSS 25	25	100		8.50
OVAL SADDLE STRAP BASE					
362	POB	Standard	100		8.50
OVAL 'U' CLIP					
363	POU 16	16	200		4.50
364	POU 20	20	150		6.50
365	POU 25	25	150		8.50
OVAL TO ROUND ADAPTOR					
366	PORA 16	16	100		4.50
367	PORA 20	20	50		8.50
368	PORA 25	25	25		9.50



G.I. & M.S. Conduit Pipes & Fittings



Precision G.I & M.S. Conduit Pipes are manufactured from a rigorously tested raw material, in accordance to IS 9537 Part – 2.

G.I Conduit Pipes are coated by hot dipped galvanising plant in which iron or steel is coated with layer of zinc. This coating renders a safety finish to the conduit, which is durable in industrial installations, coastal line atmosphere & thermal power stations.

M.S. Conduit Pipes are treated and coated with paint.

Application :

Channelising Electrical surface wiring and cable ducting.

Features :

- Anti – rust coating and good finish
- Easy to cut
- High resistance to corrosion

G. I. - Silver



M. S. - Black



Dimensions of G.I. & M.S. Conduit Pipes

NORMAL SIZE	OUTSIDE DIAMETER	TOLERANCE OD	WALL THICKNESS	WALL THICKNESS TOLERANCE
MM	MM	MM	MM	MM
20	20	0+, -0.3	1.60	±0.2
25	25	0+, -0.4	1.60	±0.2
32	32	0+, -0.4	1.60	±0.2
40	40	0+, -0.4	2.00	+0.2, -0.4
50	50	0+, -0.5	2.00	+0.2, -0.4

G.I. & M.S. CONDUIT PIPES

HSN : 73269090



COLOUR : **BLACK** **SILVER**

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK Pc x Mtr Mtr/Bdl	RATE (Mtr)
G.I. CONDUIT PIPES - COLOUR : SILVER				
369	PGIC 20	20	26 x 3m 78	200.00
370	PGIC 25	25	21 x 3m 63	245.00
371	PGIC 32	32	16 x 3m 48	365.00
372	PGIC 40	40	10 x 3m 30	580.00
373	PGIC 50	50	5 x 3m 15	660.00



SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK Pc x Mtr Mtr/Bdl	RATE (Mtr)
M.S. CONDUIT PIPES - COLOUR : BLACK				
374	PMSC 20	20	26 x 3m 78	125.00
375	PMSC 25	25	21 x 3m 63	160.00
376	PMSC 32	32	16 x 3m 48	225.00
377	PMSC 40	40	10 x 3m 30	375.00
378	PMSC 50	50	5 x 3m 15	495.00



G.I. & M.S. CONDUIT PIPE FITTINGS

HSN : 73269099



COLOUR : **BLACK** **SILVER**



CIRCULAR BOX WITH LID AND SCREW

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)
		OD (mm)	Pc/Box	Pc/Carton	
G.I. CIRCULAR BOX - TERMINAL - 1 WAY (SCREW TYPE)					
379	PGIB 251	25	20	200	76.00
M.S. CIRCULAR BOX - TERMINAL - 1 WAY (SCREW TYPE)					
380	PMSB 201	20	20	200	50.50
381	PMSB 251	25	20	200	56.00
G.I. CIRCULAR BOX - THROUGH - 2 WAY (SCREW TYPE)					
382	PGIB 252S	25	20	200	79.00
M.S. CIRCULAR BOX - THROUGH - 2 WAY (SCREW TYPE)					
383	PMSB 202S	20	20	200	54.00
384	PMSB 252S	25	20	200	58.50
G.I. CIRCULAR BOX - TEE - 3 WAY (SCREW TYPE)					
385	PGIB 253	25	20	200	83.50
M.S. CIRCULAR BOX - TEE - 3 WAY (SCREW TYPE)					
386	PMSB 203	20	20	200	56.50
387	PMSB 253	25	20	200	63.00




CIRCULAR BOX WITH LID AND SCREW

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)
		OD (mm)	Pc/Box	Pc/Carton	
G.I. CIRCULAR BOX - INTERSECTION - 4 WAY (SCREW TYPE)					
388	PGIB 254	25	20	200	87.00
M.S. CIRCULAR BOX - INTERSECTION - 4 WAY (SCREW TYPE)					
389	PMSB 204	20	20	200	64.50
390	PMSB 254	25	20	200	68.50
G.I. INSPECTION BEND (SCREW TYPE)					
391	PGI25 IB	25	20	200	79.50
M.S. INSPECTION BEND (SCREW TYPE)					
392	PMS20 IB	20	20	200	51.50
393	PMS25 IB	25	20	200	58.00
M.S. NORMAL BEND - INTERNAL THREAD					
394	PMS25NB	25	12	144	-



uPVC Mini/Maxi Trunking Profile & Fittings

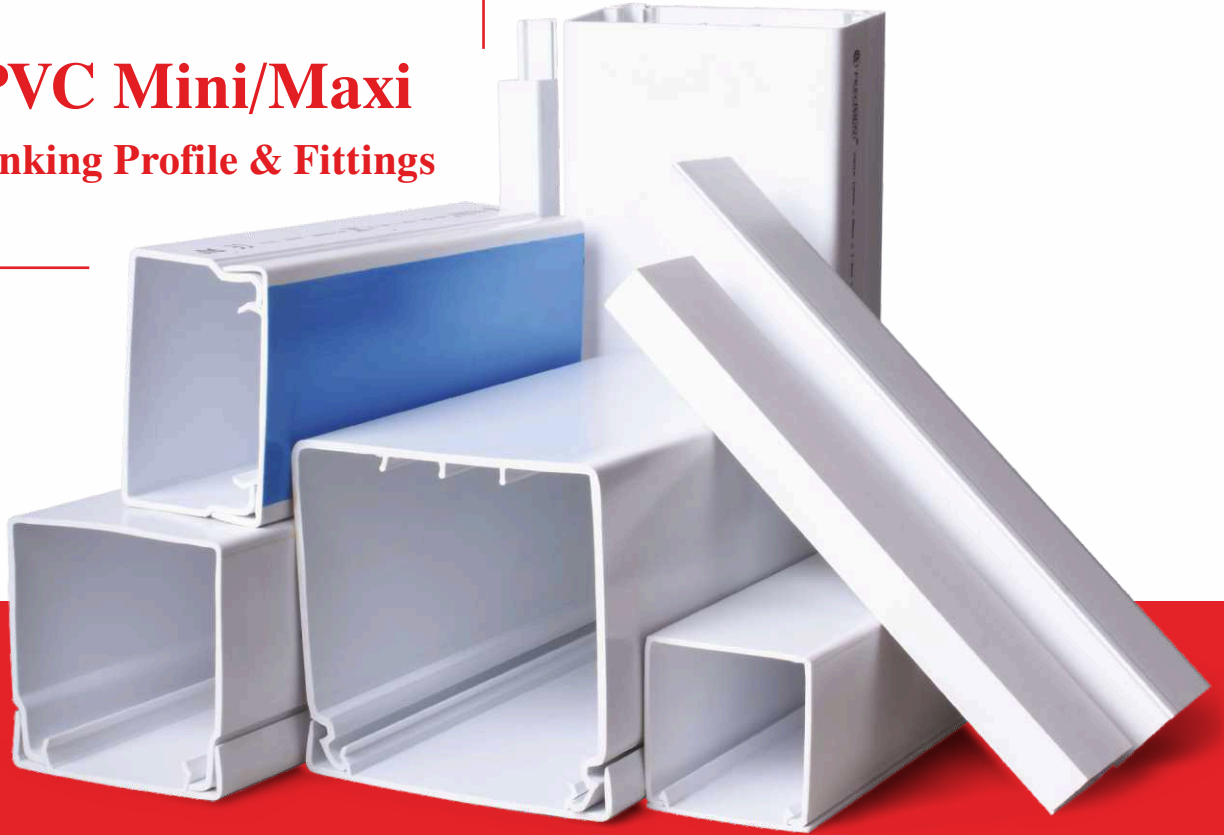

Precision uPVC Mini/Maxi Trunking Profile and Fittings are manufactured from high impact unplasticised polyvinyl chloride (uPVC) grade material capable of withstanding the most hazardous conditions on-site and exceeds the most stringent requirements of Indian and International standards. The product range brings a whole new world of sophistication and convenience to home, office and commercial establishments and is in accordance with Indian Standards IS 14927-Part 2 and BS EN 50085-2-1. Mini Trunking Profile are also available with self fixing tape for instant and easy installation. Clip on lid provides security while allowing easy maintenance.

Precision uPVC Maxi Trunking Profile Cable Management System is designed for convenience and safety with compartments for separate wiring applications. Maxi Trunking Profile fittings are available in moulded and fabricated form, thus adding a sleek touch to your interiors.

Application


To organize and protect cables on surface.

Features


- Fast installation and easy maintenance.
- Secure and elegant look.
- Wide range of sizes to suit all cabling requirements
- Durable and impact resistant
- Fire retardant
- Corrosion free
- Thermal resistant from -5°C to +60°C

Colours

Ivory, White



Fire retardant,
corrosion free




Wide range

uPVC MINI / MAXI TRUNKING PROFILE

HSN : 39162019

 COLOUR : IVORY WHITE


SR NO	PRODUCT CODE	SIZE W x H (mm)	STANDARD PACK Pc x Mtr	Mtr/Bdl	RATE (Mtr)
uPVC MINI TRUNKING PROFILE (IVORY / WHITE)					
395	PT2012	20 x 12	100 x 2m	200	33.50
396	PT2512	25 x 12	100 x 2m	200	41.50
397	PT3212	32 x 12	100 x 2m	200	52.50
398	PT1616	16 x 16	100 x 2m	200	34.00
399	PT2516	25 x 16	100 x 2m	200	45.00
400	PT3816	38 x 16	50 x 2m	100	80.00
401	PT3825	38 x 25	50 x 2m	100	119.00
402	PT3838	38 x 38	25 x 2m	50	145.00
403	PT5016	50 x 16	50 x 2m	100	122.00
uPVC MINI TRUNKING PROFILE (SELF ADHESIVE - IVORY / WHITE)					
404	PTS1616	16 x 16	100 x 2m	200	56.00
405	PTS2516	25 x 16	100 x 2m	200	77.00
406	PTS3816	38 x 16	50 x 2m	100	124.00
407	PTS3825	38 x 25	50 x 2m	100	163.00



SR NO	PRODUCT CODE	SIZE W x H (mm)	STANDARD PACK Pc x Mtr	Mtr/Bdl	RATE (Mtr)
uPVC MAXI TRUNKING PROFILE (WHITE)					
408	PT5050	50 x 50	20 x 2m	40	202.00
409	PT 7550	75 x 50	12 x 2m	24	489.00
410	PT 7575	75 x 75	9 x 2m	18	633.00
411	PT 10050	100 x 50	10 x 2m	20	790.00
412	PT 100100	100 x 100	6 x 2m	12	1146.00
413	PT 15050	150 x 50	5 x 2m	10	1199.00
MT - MAXI TRUNKING PROFILE (WHITE)					
414	PMT150150	150 x 150	2 x 3m	6	1470.00
uPVC MAXI TRUNKING PROFILE DIVIDER (WHITE)					
415	PMTD	Standard	50 x 2m	100	110.00
RECTANGULAR CHANNEL PROFILE (WHITE)					
416	PCH 13	13 x 9	50 x 2m	100	24.50
417	PCH 25	25 x 9	50 x 2m	100	30.50
418	PCH 38	38 x 9	50 x 2m	100	39.50



∞ For 100 x 50

uPVC MINI / MAXI TRUNKING PROFILE FITTINGS (MOULDED)

HSN : 39174000

 COLOUR : IVORY WHITE

SR NO	PRODUCT CODE	SIZE W x H (mm)	STANDARD PACK Pc/Box	RATE (Pc)
COUPLER				
419	PTC 2012	20 x 12	100	4.50
420	PTC 2512	25 x 12	100	3.50
421	PTC 3212	32 x 12	100	4.00
422	PTC 1616	16 x 16	100	4.50
423	PTC 2516	25 x 16	100	4.50
424	PTC 3816	38 x 16	50	7.50
425	PTC 3825	38 x 25	50	8.50
426	PTC 10050	100 x 50(W)	10	20.00
ELBOW				
427	PTB 2012	20 x 12	100	6.00
428	PTB 2512	25 x 12	100	4.50
429	PTB 3212	32 x 12	100	7.50
430	PTB 1616	16 x 16	100	4.50
431	PTB 2516	25 x 16	100	6.50
432	PTB 3816	38 x 16	100	9.00
433	PTB 3825	38 x 25	100	10.50
434	PTB 10050	100 x 50(W)	10	83.00
TEE				
435	PTT 2012	20 x 12	100	6.50
436	PTT 2512	25 x 12	50	6.00
437	PTT 3212	32 x 12	50	8.50
438	PTT 1616	16 x 16	100	6.50
439	PTT 2516	25 x 16	50	7.00
440	PTT 3816	38 x 16	50	10.50
441	PTT 3825	38 x 25	50	12.00
442	PTT 10050	100 x 50(W)	10	77.50



SR NO	PRODUCT CODE	SIZE W x H (mm)	STANDARD PACK Pc/Box	RATE (Pc)
INTERNAL BEND				
443	PTI 2512	25 x 12	100	2.50
444	PTI 3212	32 x 12	100	4.50
445	PTI 1616	16 x 16	100	4.50
446	PTI 2516	25 x 16	100	5.50
447	PTI 3816	38 x 16	100	6.50
448	PTI 3825	38 x 25	50	8.50
449	PTI10050	100 x 50(W)	10	32.00
EXTERNAL BEND				
450	PTE 2512	25 x 12	100	3.00
451	PTE 3212	32 x 12	100	6.00
452	PTE 1616	16 x 16	100	6.50
453	PTE 2516	25 x 16	100	7.50
454	PTE 3816	38 x 16	100	8.50
455	PTE 3825	38 x 25	50	12.50
456	PTE 10050	100 x 50(W)	10	56.00
4 WAY				
457	PTW3212	32 x 12	50	14.50
END CAP				
458	PMTC 100	100 x 50(W)	50	16.50



uPVC MINI / MAXI TRUNKING PROFILE FITTINGS (MOULDED)

HSN : 39162019

COLOUR : IVORY WHITE

SR NO	PRODUCT CODE	SIZE W x H (mm)	STANDARD PACK Pc/Box Pc/Carton		RATE (Pc)
JUNCTION LINKER					
459	PTJL7575	Standard	25	500	9.50



SR NO	PRODUCT CODE	SIZE W x H (inch)	STANDARD PACK Pc/Box Pc/Carton		RATE (Pc)
SURFACE SWITCH BOX - TRUNKING KNOCKOUT (WHITE)					
\$ 460	PTSB1	3" x 3"	10	300	56.50
\$ 461	PTSB2	6" x 3"	10	200	95.00



\$ 16x16,25x16 Knockout Available

UPVC MINI / MAXI TRUNKING PROFILE FITTINGS (FABRICATED)

HSN : 39174000

COLOUR : WHITE


SR NO	PRODUCT CODE	SIZE W x H (mm)	STANDARD PACK Pc/Bag	RATE (Pc)
ELBOW				
462	PMTL50	50 x 50	5	109.00
463	PMTL751	75 x 50	5	262.00
464	PMTL752	75 x 75	5	312.00
465	PMTL1002	100 x 100	5	443.00
466	PMTL1501	150 x 50	5	421.00
467	PMTL1502	150 x 150	-	-
TEE				
468	PMTT50	50 x 50	5	153.00
469	PMTT751	75 x 50	5	262.00
470	PMTT752	75 x 75	5	312.00
471	PMTT1002	100 x 100	5	443.00
472	PMTT1501	150 x 50	5	421.00
473	PMTT1502	150 x 150	-	-
INTERNAL ANGLE				
474	PMTI50	50 x 50	5	109.00
475	PMTI751	75 x 50	5	262.00
476	PMTI752	75 x 75	5	312.00
477	PMTI1002	100 x 100	5	443.00
478	PMTI1501	150 x 50	5	421.00
479	PMTI1502	150 x 150	-	-



SR NO	PRODUCT CODE	SIZE W x H (mm)	STD.PACK Pc/Bag	RATE (Pc)
EXTERNAL ANGLE				
480	PMTE50	50 x 50	5	109.00
481	PMTE751	75 x 50	5	262.00
482	PMTE752	75 x 75	5	312.00
483	PMTE1002	100 x 100	5	443.00
484	PMTE1501	150 x 50	5	421.00
485	PMTE1502	150 x 150	-	-
END CAP				
486	PFTC50	50 x 50	5	30.50
487	PFTC751	75 x 50	5	42.00
488	PFTC752	75 x 75	5	48.50
489	PFTC1002	100 x 100	5	102.00
490	PFTC1501	150 x 50	5	114.00



uPVC Panel Trunking

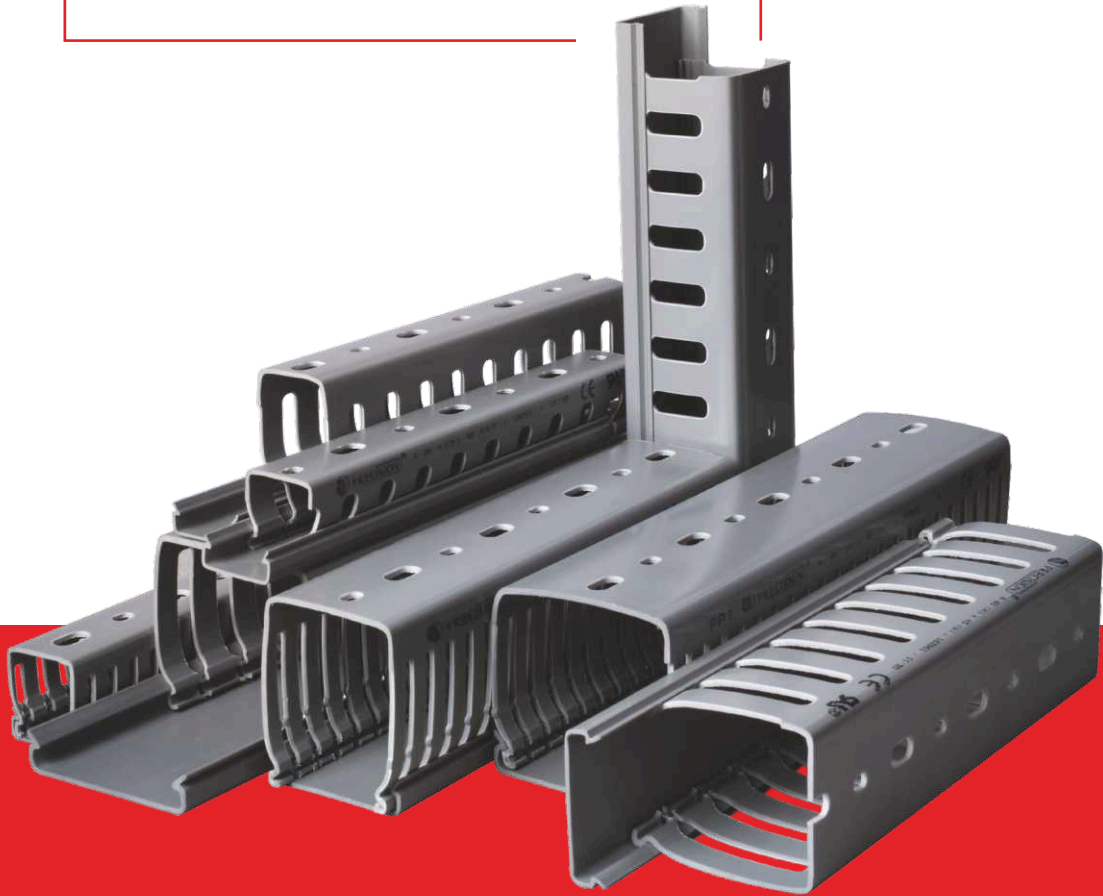

Precision uPVC Panel Trunking are manufactured from high impact unplasticised polyvinyl chloride (uPVC) to ensure panel & machinery safety in extreme conditions. These trunkings are ideal to channelise medium and big size panels & various applications where economy, space saving, safety and durability are paramount.

Applications

To conduct, organize, and protect cables inside electrical and telecommunication panels, industrial machinery wiring, Computer LAN wiring and data centers.

Features

- Non – brittle, flame retardant, wrap proof
- Vertical slids and detachable strips facilitates systematic wiring, permits faster connections, additions and fault tracing of wires
- Avoids bunching, taping and provides complete electrical insulation
- Unique cover locking design prevents popping of wires while removing cover
- Elongated slots at bottom allows flexible mounting
- High tensile strength 390 kg/cm²
- Thermal resistant from -5°C to +60°C

Colour
Grey



Thermal resistant

uPVC PANEL TRUNKING

HSN : 85381010

COLOUR : GREY



SR NO	PRODUCT CODE	SIZE H x W (mm)	STANDARD PACK		RATE (Mtr)
uPVC PANEL TRUNKING - STANDARD SLOT					
491	PPT1515	15 x 15	200 x 1m	200	56.50
492	PPT2525	25 x 25	130 x 1m	130	85.50
493	PPT3025	30 x 25	125 x 1m	125	92.50
494	PPT4525	45 x 25	90 x 1m	90	113.00
495	PPT4545	45 x 45	50 x 1m	50	157.00
496	PPT4560	45 x 60	50 x 1m	50	202.00
497	PPT6025	60 x 25	70 x 1m	70	145.00
498	PPT6040	60 x 40	60 x 1m	60	181.00
499	PPT6045	60 x 45	50 x 1m	50	182.00
500	PPT6060	60 x 60	40 x 1m	40	229.00
501	PPT7525	75 x 25	60 x 1m	60	185.00
502	PPT7575	75 x 75	30 x 1m	30	336.00
503	PPT10075	100 x 75	24 x 1m	24	550.00
504	PPT100100	100 x 100	16 x 1m	16	649.00



SR NO	PRODUCT CODE	SIZE H x W (mm)	STANDARD PACK		RATE (Mtr)
uPVC PANEL TRUNKING - THIN SLOT					
505	PPT3025TS	30 x 25	125 x 1m	125	96.50
506	PPT4525TS	45 x 25	90 x 1m	90	119.00
507	PPT4545TS	45 x 45	50 x 1m	50	165.00
508	PPT4560TS	45 x 60	50 x 1m	50	203.00
509	PPT6025TS	60 x 25	70 x 1m	70	155.00
510	PPT6040TS	60 x 40	60 x 1m	60	192.00
511	PPT6045TS	60 x 45	50 x 1m	50	193.00
512	PPT6060TS	60 x 60	40 x 1m	40	241.00



SR NO	PRODUCT CODE	SIZE (mm)	STANDARD PACK		RATE (Mtr)
uPVC PANEL TRUNKING - TOP COVER					
513	PPT25T	25	100 x 1m	100	53.50
514	PPT40T	40	50 x 1m	50	58.00
515	PPT45T	45	50 x 1m	50	61.50
516	PPT60T	60	50 x 1m	50	96.50
517	PPT75T	75	25 x 1m	25	137.00
518	PPT100T	100	25 x 1m	25	153.00




OPTIMAL GRIP LID

- Precision's Panel Trunking lid design provides high capacity to sustain leads of wire in the case of a cable positioned in the centre of the duct and avoids them from riding up.
- Quick snap on/off and non-slip assembly forms a firm rigid channel.

- Interlocking lid and channel is optimised to make the system easier to install and to provide discrete routing of cables.
- Uniform grip and thickness throughout the length system with independent non-slip lid, keeps cover in place during high vibration applications.



STANDARD SLOT




THIN SLOT




WALL PERFORATION RIB DESIGN

- All wall perforation ribs of Precision Panel Trunking have larger rounded slots for easy insertion of wires and cables.
- Rounded design with burr-free edges to prevent any injury to the hand of the user or to the cable insulation.




ELONGATED MOUNTING SLOTS

- Perforated base with elongated slot allows flexible mounting and better fastening of the cables.
- Robust sections.



For Panel Trunking
75 x 75, 100 x 75 & 100 x 100



For Panel Trunking
15 x 15, 25 x 25, 30 x 25, 45 x 25, 45 x 45,
45 x 60, 60 x 25, 60 x 45, 60 x 60

• All dimensions in (mm)

Corrugated Flexible Conduit Pipes & Fittings

Precision Corrugated Flexible Conduit Pipes come in a wide and comprehensive range of material variants to suit variety of applications. These conduits are manufactured in slit and non-slit variants based on the final application for wiring purposes.


Polypropylene Flexible Conduits are the best solution for applications where resistance to constant flexing and vibration is essential. These conduits display excellent flexibility, moreover, they are light weight and easy to install which makes them very popular. Temperature resistant from -5°C to +90°C.

Fire Retardant Polypropylene Flexible Conduits are self extinguishing. These conduits are manufactured from UL94 V2 rated material, ideally suited for automobile applications, wire harnessing, electrical wiring, cable protection and an envelope to LPG gas conductors. Temperature resistant from -5°C to +90°C.

Polyamide Flexible Conduits are manufactured from flame retardant and self extinguishing (PA6) material, making them suitable for high temperature zones where human life or components are at risk, high resistance to corrosion by most mineral oils, acids and alkalis. They are widely used in automobile applications and have temperature resistance upto +120°C.

Steel Wire Reinforced Flexible uPVC Conduits are manufactured with soft polyvinyl chloride (uPVC) wall fused to high tensile steel wire in a coiled state. These conduits are unaffected by inorganic acid, alkali, saline water. Most suitable for electrical wiring in building, switch boards, panels, machinery, dust collectors, air dusting, exhaust of fumes, shrouds of railway coach wiring and hospital equipments. Temperature resistant from -5°C to +60°C.

Colours



Black, Grey, Ivory & White



Red, Green, Blue & Yellow



Fire retardant,
corrosion free



Precision Galvanised Steel Flexible Conduit

Precision Steel Flexible Conduit Pipes are made from Galvanized steel, helical wound strips having a Square Lock type Construction and are manufactured in accordance to Indian/British Standards in Galvanized zinc coating with spiral corrugated pattern finished surface. Mostly used as low pressure hose in Industrial domestic air Conditioning, Ventilation systems and as mechanical protection for insulated electrical cables & wires which may be exposed to atmospheric conditions.

Precision Galvanised Steel Flexible Conduit with PVC Coating

Precision PVC Coated Steel Flexible Conduit Pipes are made from Galvanized steel, helical wound strips having a Square Lock type Construction and are manufactured in accordance to Indian/British Standards in poly vinyl coating Black/Grey colour with spiral corrugated pattern finished surface.

Most suitable for Mechanical protection of cable and wire in tunnels, hospitals, high-rise office blocks and public buildings.

CORRUGATED FLEXIBLE CONDUIT PIPES

HSN : 39173100

BLACK	GREY	IVORY	WHITE	RED	GREEN	BLUE	YELLOW
-------	------	-------	-------	-----	-------	------	--------

DIMENSIONS OF CORRUGATED FLEXIBLE CONDUITS			
Nominal Diameter (mm)	Maximum Outside Diameter (mm)	Tolerance On Outside Diameter (mm)	Minimum Inside Diameter (mm)
10	10	-0.1	7.0
16	16	-0.3	10.7
20	20	-0.3	14.1
25	25	-0.4	18.3
32	32	-0.4	24.3
40	40	-0.4	31.2
50	50	-0.5	39.6
63	63	-0.6	52.6

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE (Mtr)
			Mtr/Coil	Mtr/Bag	
(PP) POLY PROPYLENE					
519	PCFC 10	10	100	1000	11.50
520	PCFC 16	16	50	500	11.50
521	PCFC 20	20	50	500	15.50
522	PCFC 25	25	25	250	22.50
523	PCFC 32	32	25	250	35.50
524	PCFC 40	40	20	100	48.50
525	PCFC 50	50	15	75	75.50
526	PCFC 63	63	10	50	118.00
FRPP (FIRE RETARDANT POLY PROPYLENE)					
527	PCFR 10	10	100	1000	22.00
528	PCFR 16	16	50	500	22.00
529	PCFR 20	20	50	500	24.50
530	PCFR 25	25	25	250	36.00
531	PCFR 32	32	25	250	57.50
532	PCFR 40	40	20	100	85.50
533	PCFR 50	50	15	75	122.00
534	PCFR 63	63	10	50	202.00



DIMENSIONS OF GALVANIZED STEEL FLEXIBLE CONDUIT PIPES				
Normal Size (mm)	Normal Size (inch)	OD (mm)	ID (mm)	Bending radius/mm
16	1/2"	15.5	12.5	40
20	3/4"	22.5	19.5	55
25	1"	28	25.0	60
32	1 1/4"	35.0	32.0	70
40	1 1/2"	42.0	38.0	80
50	2"	54.0	50.0	90

*Tolerance : Size below 50mm, +/- 1mm & above 50mm +/- 3mm

DIMENSIONS OF GALVANIZED STEEL FLEXIBLE CONDUIT PIPES WITH PVC COATING				
Normal Size (mm)	Normal Size (inch)	OD (mm)	ID (mm)	Bending radius/mm
16	1/2"	16.5	12.5	40
20	3/4"	23.5	19.5	55
25	1"	29	25.0	60
32	1 1/4"	36.5	32.0	70
40	1 1/2"	44.0	38.0	80
50	2"	57.0	51.0	90

*Tolerance : Size below 50mm, +/- 1mm & above 50mm +/- 3mm

CORRUGATED FLEXIBLE CONDUIT PIPES (SLITTED)

HSN : 39173100

BLACK	GREY	IVORY	WHITE	RED	GREEN	BLUE	YELLOW
-------	------	-------	-------	-----	-------	------	--------

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE (Mtr)
			Mtr/Coil	Mtr/Bag	
(PP) POLY PROPYLENE					
535	PCFC 10S	10	100	1000	14.50
536	PCFC 16S	16	50	500	14.50
537	PCFC 20S	20	50	500	17.50
538	PCFC 25S	25	25	250	25.50
539	PCFC 32S	32	25	250	39.50
540	PCFC 40S	40	20	100	51.00
541	PCFC 50S	50	15	75	77.50
542	PCFC 63S	63	10	50	120.00
FRPP (FIRE RETARDANT POLY PROPYLENE)					
543	PCFR 10S	10	100	1000	24.50
544	PCFR 16S	16	50	500	24.50
545	PCFR 20S	20	50	500	27.50
546	PCFR 25S	25	25	250	39.00
547	PCFR 32S	32	25	250	60.00
548	PCFR 40S	40	20	100	88.00
549	PCFR 50S	50	15	75	125.00
550	PCFR 63S	63	10	50	205.00



CORRUGATED FLEXIBLE CONDUIT PIPE FITTINGS

HSN : 39174000

COLOUR : **BLACK** **GREY**

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE (Pc)
			Pc/Box	Pc/Carton	
CORRUGATED FLEXIBLE CONDUIT GLAND					
551	PFAG 16	16	125	2250	5.50
552	PFAG 20	20	75	1350	7.50
553	PFAG 25	25	50	900	9.50
554	PFAG 32	32	30	540	11.50
555	PFAG 40	40	20	360	17.00
556	PFAG 50	50	5	150	22.00



CORRUGATED FLEXIBLE CONDUIT PIPES

HSN : 39173100

COLOUR : **BLACK** **GREY**

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE (Mtr)
			Mtr/Coil	Mtr/Bag	
NYLON (POLYAMIDE)					
557	PCPA 10	10	100	1000	83.00
558	PCPA 16	16	50	250	89.00
559	PCPA 20	20	50	250	105.00
560	PCPA 25	25	25	125	154.00
561	PCPA 32	32	25	125	235.00
562	PCPA 40	40	20	100	319.00
563	PCPA 50	50	15	75	443.00
564	PCPA 63	63	10	50	693.00



STEEL WIRE REINFORCED FLEXIBLE uPVC CONDUIT PIPE

HSN : 39172190

COLOUR : **GREY**

SR NO	PRODUCT CODE	SIZE ID (mm)	STANDARD PACK		RATE (Mtr)
			Mtr/Coil	Mtr/Bag	
STEEL WIRE REINFORCED FLEXIBLE uPVC CONDUIT PIPES					
565	PCWR 10	10	30	300	53.50
566	PCWR 16	16	30	300	57.50
567	PCWR 20	20	30	240	79.50
568	PCWR 25	25	30	210	91.00
569	PCWR 30	30	30	150	117.00
570	PCWR 40	40	30	120	142.00
571	PCWR 50	50	30	90	161.00
572	PCWR 60	60	15	75	225.00



STEEL WIRE REINFORCED FLEXIBLE uPVC CONDUIT PIPE FITTINGS

HSN : 39174000

COLOUR : **GREY**

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE (Pc)
			Pc/Box	Pc/Carton	
STEEL WIRE REINFORCED FLEXIBLE uPVC CONDUIT GLAND					
573	PFRG 10	10	75	1350	9.50
574	PFRG 16	16	60	1080	11.00
575	PFRG 20	20	45	810	14.00
576	PFRG 25	25	30	540	18.00
577	PFRG 30	30	20	360	23.00
578	PFRG 40	40	15	270	30.00
579	PFRG 50	50	5	150	42.50



GALVANIZED STEEL FLEXIBLE CONDUIT PIPES

HSN : 83071000

COLOUR : **SILVER**

SR NO	PRODUCT CODE	NORMAL SIZE (mm)	NORMAL SIZE (inch)	STANDARD PACK		RATE (Mtr)
				Mtr/Coil	Mtr/Bag	
GALVANIZED STEEL FLEXIBLE CONDUIT						
580	PGIFC16	16	1/2"	15	210	33.50
581	PGIFC20	20	3/4"	15	150	43.50
582	PGIFC25	25	1"	15	105	62.00
583	PGIFC32	32	1 1/4"	15	75	84.50
584	PGIFC40	40	1 1/2"	15	75	102.00
585	PGIFC50	50	2"	10	50	148.00



GALVANISED STEEL FLEXIBLE CONDUIT WITH PVC COATING

HSN : 83071000

COLOUR : **BLACK** **GREY**

SR NO	PRODUCT CODE	NORMAL SIZE (mm)	NORMAL SIZE (inch)	STANDARD PACK		RATE (Mtr)
				Mtr/Coil	Mtr/Bag	
GALVANISED STEEL FLEXIBLE CONDUIT WITH PVC COATING						
586	PGIFCP16	16	1/2"	50	250	53.00
587	PGIFCP20	20	3/4"	25	150	64.50
588	PGIFCP25	25	1"	25	125	91.00
589	PGIFCP32	32	1 1/4"	15	75	136.00
590	PGIFCP40	40	1 1/2"	15	75	163.00
591	PGIFCP50	50	2"	15	60	203.00



DOUBLE WALL CORRUGATED (DWC) Pipes & Fittings



Precision DWC PE Pipes are manufactured from HDPE material in accordance with IS 16205 (Part 24) : 2018 / IS 14930 (Part 2) : 2001 for cable ducting with a bending radius of 2200mm. The outer layer having corrugation and inner layer with plain and smooth surface for excellent mechanical & electrical properties for cable ducting.

Application

These pipes are meant for protection of cables for Telecom Ducting, Power Cable Distribution, Electrical Applications, indoor ventilation.

Features

- Excellent underground life
- Leak proof tightness
- Flame retardant
- Excellent impact strength
- Resistance to external influences IP 67,
- Chemical resistance
- Protection against rodent infestation

Colour

Black & Orange



Fire retardant,
corrosion free

DOUBLE WALL CORRUGATED (DWC) PIPES

HSN : 39172190



COLOUR : **BLACK** **ORANGE**

SR NO	PRODUCT CODE	STD. SIZE		RATE (mtr)	RATE 6mtr/pc
		OD mm	ID mm		
HIGH DENSITY POLYETHYLENE PIPE WITH 1 COUPLER (450 N)					
592	PDWC 75	75	63	-	-
593	PDWC 90	90	75	-	-
594	PDWC 110	110	95	-	-
595	PDWC 120	120	103	-	-
596	PDWC 160	160	135	-	-
597	PDWC 180	180	150	-	-
598	PDWC 200	200	175	-	-



DOUBLE WALL CORRUGATED (DWC) PIPE FITTINGS

HSN : 39172190

COLOUR : **BLACK** **ORANGE**

SR NO	PRODUCT CODE	SIZE ID (mm)	STANDARD PACK Pc/Box	RATE (Pc)
COUPLER				
599	PDWC 75C	75	1	-
600	PDWC 90C	90	1	-
601	PDWC 110C	110	1	-
602	PDWC 120C	120	1	-
603	PDWC 160C	160	1	-
604	PDWC 180C	180	1	-
605	PDWC 200C	200	1	-
1- 90° BEND WITH (1-BEND + 2 COUPLER)				
606	PDWC 75B	75	1	-
607	PDWC 90B	90	1	-
608	PDWC 110B	110	1	-
609	PDWC 120B	120	1	-
610	PDWC 160B	160	1	-
611	PDWC 180B	180	1	-
612	PDWC 200B	200	1	-



SR NO	PRODUCT CODE	SIZE ID (mm)	STANDARD PACK Pc/Box	RATE (Pc)
1- EQUAL TEE WITH (1-EQUAL TEE + 3 COUPLER)				
613	PDWC 75T	75	1	-
614	PDWC 90T	90	1	-
615	PDWC 110T	110	1	-
616	PDWC 120T	120	1	-
617	PDWC 160T	160	1	-
618	PDWC 180T	180	1	-
619	PDWC 200T	200	1	-
1- 45° Y TEE (1-45° Y TEE + 3 COUPLER)				
620	PDWC 75Y	75	1	-
621	PDWC 90Y	90	1	-
622	PDWC 110Y	110	1	-
623	PDWC 120Y	120	1	-
624	PDWC 160Y	160	1	-
625	PDWC 180Y	180	1	-
626	PDWC 200Y	200	1	-



PRODUCTS IN
PARTNERSHIP WITH



UK OWNED
UK MANUFACTURER 

MARSHALL TUFFLEX

INNOVATIVE IDEAS IN CABLE
MANAGEMENT

THE LARGEST SELECTION OF CABLE
MANAGEMENT SOLUTIONS FOR THE
MODERN ENVIRONMENT

- STERLING PROFILE 1
- 3 COMPARTMENT



- STERLING CURVE PROFILE 1 -
3 COMPARTMENT



www.marshall-tufflex.com

Plumbing PIPING SYSTEMS

CPVC Pipes & Fittings
ASTM (uPVC) Pipes & Fittings
Sewerage Waste and Rainwater (SWR) Pipes & Fittings
Agriculture uPVC Pipes & Fittings



TERMS & CONDITIONS

- All mentioned prices are exclusive of GST and other government taxes (if any).
- The above prices are ex-factory.
- Any revision in existing taxation or any new government taxes will be to buyers' account only.
- Prices are subjected to change without prior notice.
- Subject to Mumbai Jurisdiction.

ISO 9001:2015



Har Building ki Lifeline
PRECISION PIPELINE

Precision Plastic Industries Pvt. Ltd.

19/D, Nand Jyot Industrial Estate,
Safed Pool, Andheri-Kurla Road,
Andheri (East), Mumbai 400072, India

Customer Care : +91 77150 00015 | electrical@precisionpipes.com | www.precisionpipes.com